




• HIGH REACH TELEHANDLER •

GTH™-1056



CHARACTERISTICS

- Maximum forward reach 12.800 mm to move heavy loads over obstacles
- Twin axle-mounted stabilizers can be deployed from the cab
- Compact outside turning radius and excellent ground clearance
- Three selectable steering modes: front-wheel, coordinated and crab steer
- Powershift transmission with three speeds forward and reverse
- Comfortable, spacious cab provides excellent visibility
- Multi-function proportional joystick control for fast, precise positioning
- Frame-leveling chassis — pick up or place loads on up to 10° side slopes
- Expanded turbocharged diesel engine options
- Power-assisted steering
- High-efficiency/variable displacement hydraulic pump
- ROPS/FOPS canopy (ISO compliant)

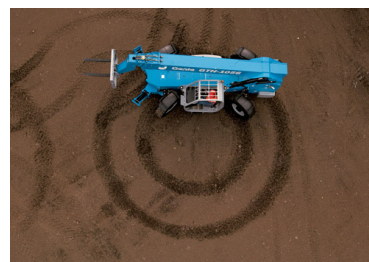

SPECIFICATIONS

Maximum lifting height	mm	17.320
Maximum forward reach	mm	12.800
Maximum lifting capacity	kg	4.536
Power source		Perkins 1204E T4i 124 HP (92.47 kW) Deutz TCD 3.6 L T4i 121 HP (90.23 kW)
Drive speed	km/h	27
Weight*	kg	13.608

*Weight depends on options

CONTACT YOUR NYKEI PARTNER FOR AN
OVERVIEW OF THE AVAILABLE ATTACHMENTS:
info@nykei-wa.com